

**DIMENSIONS**

PIPE SIZE	Dim. A	Dim. B
1"	45 mm	73 mm
1 1/4"	51 mm	77 mm
1 1/2"	54 mm	80 mm
2"	61 mm	89 mm

**SPRAY CHARACTERISTICS:**

These nozzles simply clip over a pre-drilled pipe (15mm dia. hole) and are available with a variety of spray balls, in various spray patterns, flow rates and spray angles.

**CONSTRUCTION:**


Made of corrosion-resistant plastic and stainless steel. Heavy-duty spring clip good to 6 bar at 80°C. A 316SS clip is also available, if required.

**TYPICAL APPLICATIONS:**

- Parts Cleaning
- Pretreatment
- Spray Washing & Rinsing

Double clip model also available.

**THE BEX "FINGER" SYSTEM**

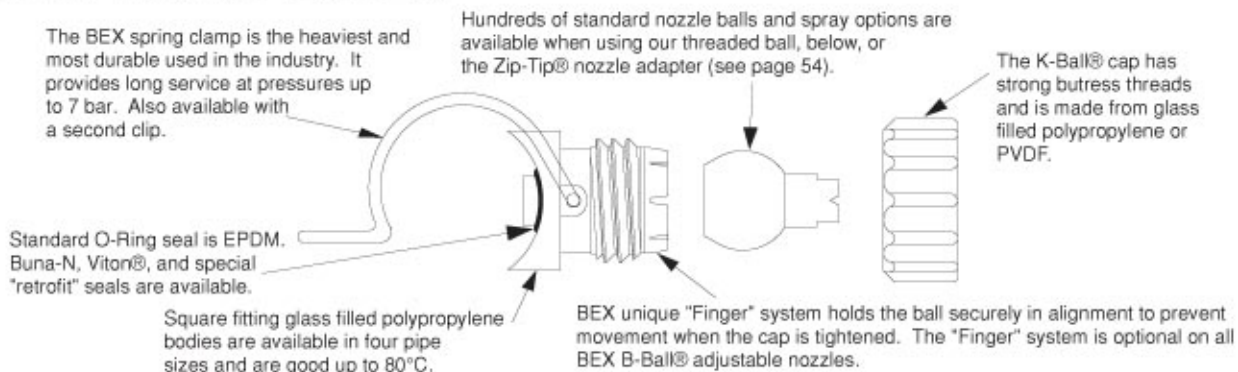

**HOW TO ORDER COMPLETE K-BALL ASSEMBLIES**

Use the correct body part number (from the parts listed in BOLD at the right), followed by the model number for the nozzle ball (see pages 59 and 60).

**Example:**

BF5070 nozzle balls are needed to fit onto a 1-1/4" pipe. Accurate alignment of the nozzles is critical, so the 1-1/4" body with "fingers" will be used. The correct PART number for this K-Ball nozzle assembly is 1.2KFBF5070.

**K-BALL BODY COLORS AND PART NUMBERS**

Pipe Sizes	1"	1-1/4"	1-1/2"	2"
Standard Body	<b>1K</b> (white)	<b>1.2K</b> (grey)	<b>1.5K</b> (black)	<b>2K</b> (tan)
Body with Fingers	<b>1KF</b> (green)	<b>1.2KF</b> (yellow)	<b>1.5KF</b> (red)	<b>2KF</b> (blue)
Spring Clip	1KCL	1.2KCL	1.5KCL	2KCL
O-ring	KOR	KOR	KOR	KOR
K-Ball Cap	KCAP	KCAP	KCAP	KCAP

SPRAY BALL: CHOOSE FROM THE TABLES ON PAGES 59 AND 60.

QUICK DISCONNECT